
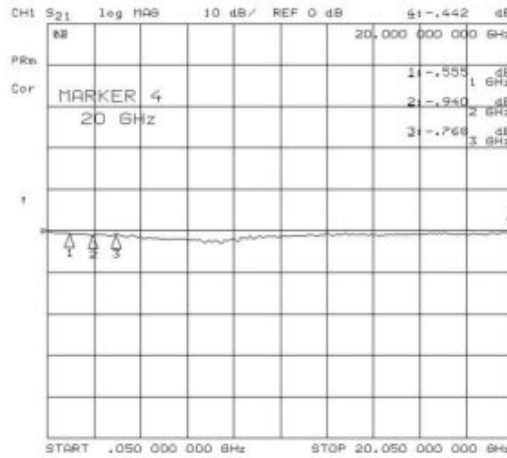



Unit:mm

CPM-GX031FF-3.13L

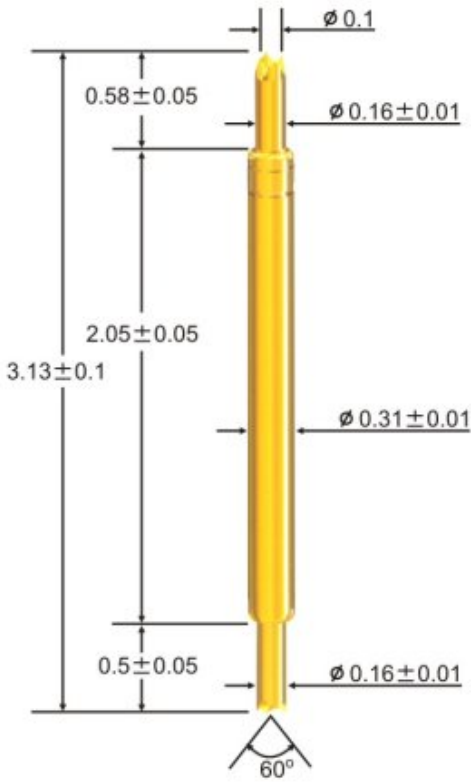



Material & Finishes
 Plunger-Top: Pd Alloy
 Plunger-Bottom: BeCu / Au Plated
 Barrel: P.B. / Au Plated
 Spring: Stainless Steel / Au Plated
Mechanical
 Spring Force: 30grams @0.35mm
 Full Travel: 0.45mm
 Recommend Travel: 0.35mm
 Mechanical Life: 250K
 Bandwidth: -0.44dB@20GHZ
Electrical
 Current Rating: 2A
 Contact Resistance: <100mΩ

荷重阻抗試驗曲線圖

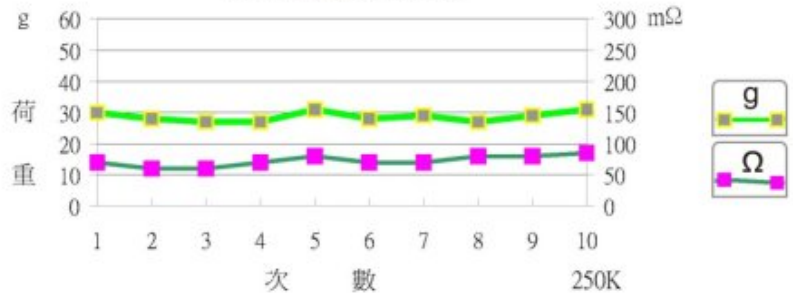

Unit:mm

CPM-GX031FD-3.3L

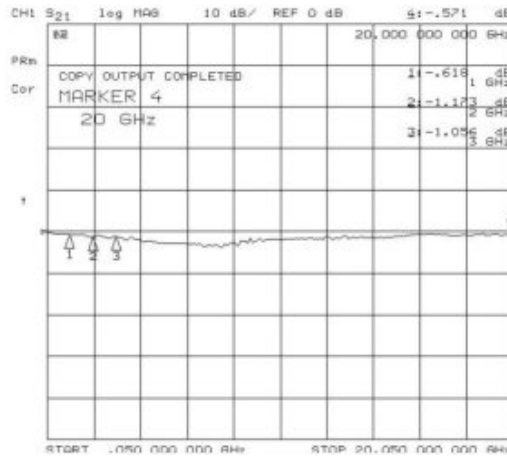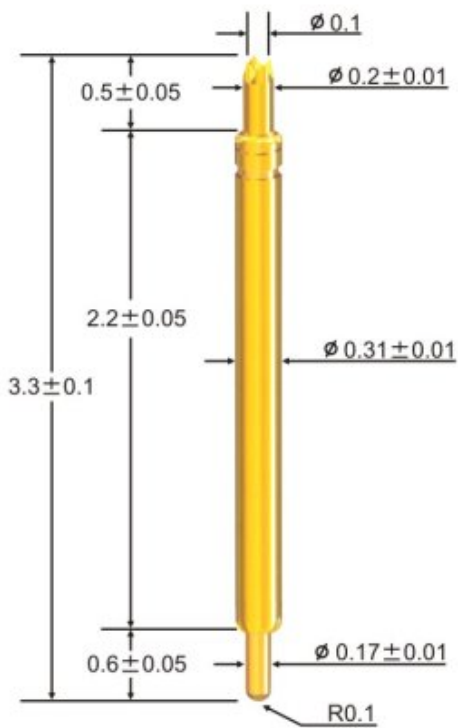

Material & Finishes
 Plunger-Top: Pd Alloy
 Plunger-Bottom: BeCu / Au Plated
 Barrel: P.B. / Au Plated
 Spring: Stainless Steel / Au Plated
Mechanical
 Spring Force: 36grams @0.35mm
 Full Travel: 0.5mm
 Recommend Travel: 0.35mm
 Mechanical Life: 250K
 Bandwidth: -0.57dB@20GHZ
Electrical
 Current Rating: 2A
 Contact Resistance: <100mΩ

荷重阻抗試驗曲線圖

